

Wirewound Resistors, Industrial Power, Adjustable Tapped Tubular



FEATURES

- Adjustable resistor or voltage divider
- High temperature silicon coating
- Can be used to quickly obtain odd resistance values
- One or more adjustable lugs can be provided for voltage divider applications
- Can be used as multi-tap resistor
- Material categorization:
For definitions of compliance please see www.vishay.com/doc?99912


RoHS*
Available

HALOGEN FREE
Available

GREEN
[5-2008]
Available

Note

* This datasheet provides information about parts that are RoHS-compliant and/or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information/tables in this datasheet for details.

STANDARD ELECTRICAL SPECIFICATIONS					
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{25^\circ\text{C}}$ W	RESISTANCE RANGE Ω	TOLERANCE \pm %	WEIGHT (typical) g
HLA012	HLA-12	12	1.0 to 10K	5	6.69
HLA020	HLA-20	20	1.0 to 18K	5	12.57
HLA025	HLA-25	25	1.0 to 23K	5	20.72
HLA026	HLA-26	26	1.0 to 31K	5	15.34
HLA050	HLA-50	50	1.0 to 57K	5	42.08
HLA051	HLA-51	51	1.0 to 95K	5	51.96
HLA060	HLA-60	60	1.0 to 74K	5	65.64
HLA065	HLA-65	65	1.0 to 130K	5	64.82
HLA080	HLA-80	80	1.0 to 111K	5	121.58
HLA100	HLA-100	100	1.0 to 132K	5	91.37
HLA120	HLA-120	120	1.0 to 180K	5	183.82
HLA130	HLA-130	130	1.0 to 192K	5	192.36
HLA160	HLA-160	160	1.0 to 249K	5	245.86
HLA175	HLA-175	175	1.0 to 398K	5	250.80
HLA225	HLA-225	225	1.0 to 337K	5	309.97


TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	HLA RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/ $^\circ\text{C}$	\pm 30 for 10 Ω and above; \pm 50 for 1 Ω to 9.9 Ω ; \pm 90 for 0.1 Ω to 0.99 Ω
Short Time Overload ⁽¹⁾	-	10 x rated power for 5 s
Maximum Working Voltage	V	$(P \times R)^{1/2}$
Operating Temperature Range	$^\circ\text{C}$	- 55 to + 350

Note

⁽¹⁾ Short time overload is rated without adjustable lug attached.

GLOBAL PART NUMBER INFORMATION																	
Global Part Numbering example: HLA22507Z200R0J																	
H	L	A	2	2	5	0	7	Z	2	0	0	R	0	J	J		
GLOBAL MODEL	TERMINAL DESIGNATION	TERMINAL FINISH	VALUE	TOLERANCE	PACKAGING	SPECIAL											
HLA225 (See "Standard Electrical Specifications" table above for additional P/N's)	02 05 06 07 14 15	E = Lead (Pb-free) Z = Tin/lead N = Nickel	R = Decimal K = Thousand 10R00 = 10.0 Ω 1K000 = 1 k Ω	J = \pm 5.0 % K = \pm 10.0 %	E = Lead (Pb)-free skin pack J (2) = Skin pack (J01)	(Dash Number) (up to 2 digits) From 1 to 99 as applicable											
Note ⁽²⁾ Tin/lead for type "Z", lead (Pb)-free for type "N"																	
Historical Part Numbering example: HLA-225-07Z 200 Ω 5 % J01																	
HLA-225	07Z	200 Ω	5 %	J01													
HISTORICAL MODEL	TERMINAL/FINISH	RESISTANCE VALUE	TOLERANCE	PACKAGING													

DIMENSIONS

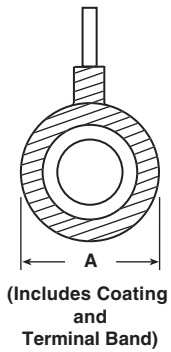

GLOBAL MODEL	DIMENSIONS in inches [millimeters]									
	A (MAX.)	CORE DIMENSIONS			TERMINAL SETBACK ± 0.031 [0.79]	DISTANCE BETWEEN TERMINALS (REF.)	TERMINAL DESIGNATION		SLIDER MODEL NUMBER (1)	BRACKET TYPE (1)
		LENGTH ± 0.063 [1.59]	O.D.	I.D. ± 0.031 [0.79]			STANDARD	OPTIONAL		
HLA012	0.406 [10.32]	1.750 [44.45]	0.313 [7.94]	0.188 [4.76]	0.094 [2.38]	1.187	05Z	14 N	70	101, 204, 301
HLA020	0.563 [14.29]	2.000 [50.80]	0.438 [11.11]	0.313 [7.94]	0.094 [2.38]	1.437	02Z	14 N	71	101, 203, 301
HLA025	0.688 [17.46]	2.000 [50.80]	0.563 [14.29]	0.313 [7.94]	0.094 [2.38]	1.312	06Z	15 N	72	101, 203, 301
HLA026	0.563 [14.29]	3.000 [76.20]	0.438 [11.11]	0.313 [7.94]	0.094 [2.38]	2.437	02Z	14 N	71	101, 203, 301
HLA050	0.688 [17.46]	4.000 [101.60]	0.563 [14.29]	0.313 [7.94]	0.094 [2.38]	3.312	06Z	15 N	72	101, 203, 301
HLA051	0.906 [23.02]	3.500 [88.90]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	2.75	06Z	15 N	73	102, 206, 303
HLA060	0.906 [23.02]	4.000 [101.60]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	3.250	06Z	15 N	73	102, 206, 303
HLA065	0.906 [23.02]	4.500 [114.30]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	3.750	06Z	15 N	73	102, 206, 303
HLA080	1.313 [33.34]	4.000 [101.60]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	2.812	07Z	15 N	74	103, 205, 303
HLA100	0.906 [23.02]	6.500 [165.10]	0.750 [19.05]	0.500 [12.70]	0.125 [2.38]	5.750	06Z	15 N	73	102, 206, 303
HLA120	1.313 [33.34]	6.000 [152.40]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	4.812	07Z	15 N	74	103, 205, 303
HLA130	1.313 [33.34]	6.500 [165.10]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	5.312	07Z	15 N	74	103, 205, 303
HLA160	1.313 [33.34]	8.000 [203.20]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	6.812	07Z	15 N	74	103, 205, 303
HLA175	1.313 [33.34]	215.90 [8.500]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	7.312	07Z	15 N	74	103, 205, 303
HLA225	1.313 [33.34]	10.500 [266.70]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	9.312	07Z	15 N	74	103, 205, 303

Note


(1) Brackets and sliders are available for mounting HLA series resistors - see Mounting Hardware.

ADJUSTABLE LUGS

The coating protects the resistance wire from shifting and shorting to other turns during adjustment. However, the following three steps should always be taken whenever adjustments are made:

1. Turn off power to avoid possible operator injury and damage to the unit.
2. Loosen adjustable lug until it will slide completely free, without touching the exposed wire.
3. When adjustment point has been selected, retighten lug only enough to assure a firm contact, do not tighten beyond this point. Failure to follow these three steps in order can result in damage to the resistor.

TERMINAL DIMENSIONS

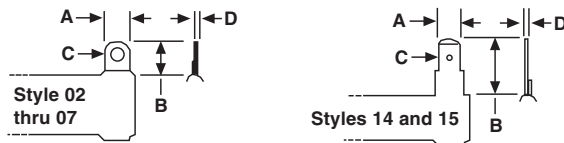

DIMENSION	TERMINAL STYLE					
	02	05	06	07	14	15
A	0.188 [4.76]	0.188 [4.76]	0.250 [6.35]	0.375 [9.53]	0.188 [4.76]	0.250 [6.35]
B	0.406 [10.32]	0.438 [11.118]	0.563 [14.29]	0.625 [15.88]	0.563 [14.29]	0.594 [15.08]
C	0.093 [2.36]	0.104 [2.64]	0.166 [4.22]	0.173 [4.39]	0.050 [1.27]	0.065 [1.65]
D	0.020 [0.51]	0.020 [0.51]	0.020 [0.51]	0.020 [0.51]	0.020 [0.51]	0.031 [0.79]

TERMINAL FINISH

“E” Finish - 100 % Sn coated steel. “Z” Finish - 60/40 Sn/Pb coated steel. “N” Finish - Nickel coated steel. Finish for terminal style 14 and 15 is limited to nickel plated steel (N).

MOUNTING HARDWARE

Mounting Hardware is available for HLA resistors, see “HL Brackets and Sliders” datasheet for more information: www.vishay.com/doc?30279.

MATERIAL SPECIFICATIONS

Element: Copper-nickel alloy or nickel-chrome alloy, depending on resistance range

Core: Ceramic, steatite


Coating: Special high temperature silicone

Standard Terminals: Model “E” terminals are tinned steel

Terminal Bands: Steel

Part Marking: Dale, model, wattage, value, tolerance, date code

DERATING

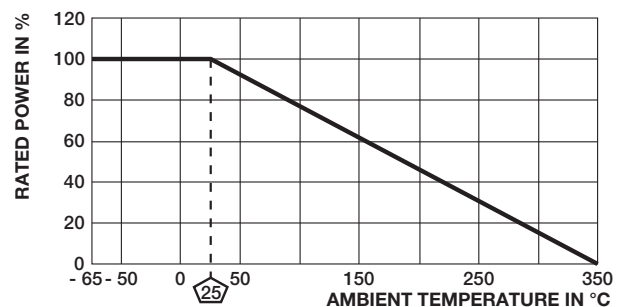



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.