SPC TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
XX	XX	XXXX	XXXX	28-08-08	XXXX	28-08-08	XXXX	28-08-08
XXXX	XXXX		XXXX	28-08-08	XXXX	28-08-08	XXXX	28-08-08

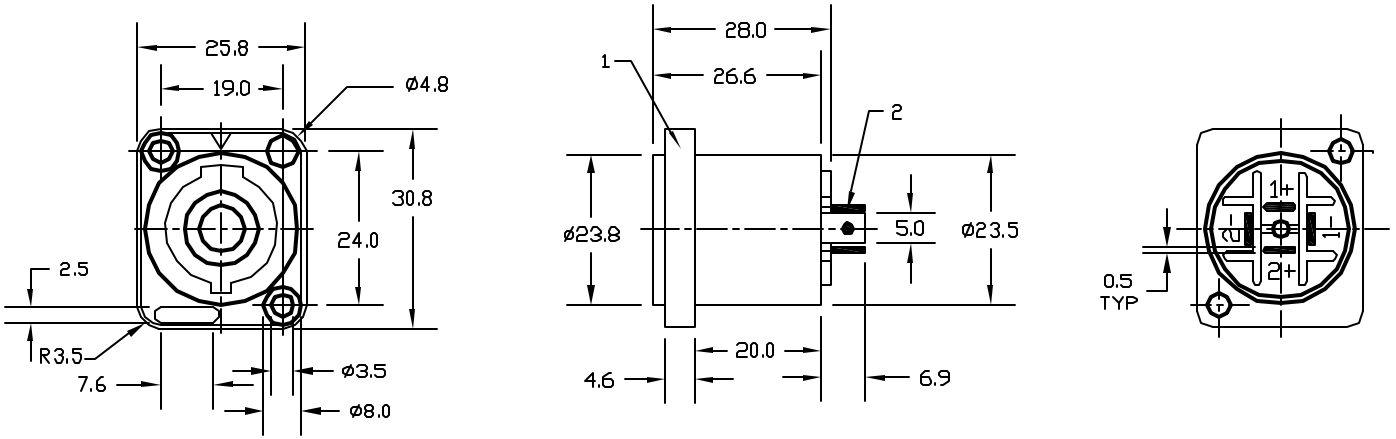

ITEM	PART	QT'Y	MATERIAL/FINISH
1	HOUSING	1	NYLON; BLACK
2	PIN	1	BRASS, NICKEL PLATED

SPECIFICATIONS:

ELECTRICAL:

CONTACT RATING	:	30A
DIELECTRIC STRENGTH	:	4000 VAC
RATED VOLTAGE	:	250 VAC
CONTACT RESISTANCE	:	3 MILLIOHMS MAX.
INSULATION RESISTANCE	:	2000 MEGOHMS MIN.

MECHANICAL:

LIFE	:	5000 CYCLES

ENVIRONMENTAL:

OPERATING TEMPERATURE	:	-30° TO +80°

RoHS Compliant

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
XXXX	28-08-08
CHECKED BY:	DATE:
XXXX	28-08-08
APPROVED BY:	DATE:
XXXX	28-08-08

DRAWING TITLE: SPEAKER CONNECTOR

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC24103	14N8163	XX

SCALE: NTS | U.O.M.: INCHES [mm] | SHEET: 1 OF 1