


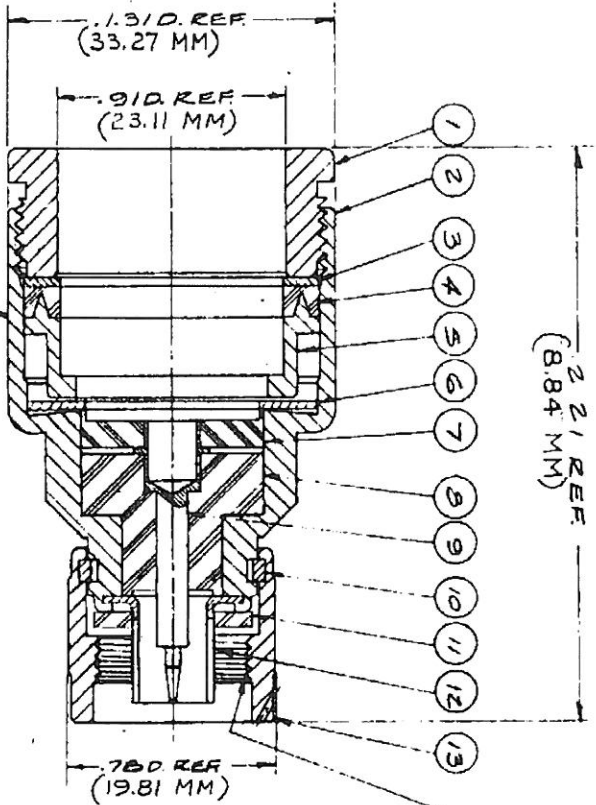


- NOTES:
1. FOR USE WITH RG-218/U CABLE.
 2. FOR CABLING PROCEDURE SEE CP 101B.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. PLACE DECIMALS ± .004
3. NO FILLETS PERMITTED
4. SURFACE ROUGHNESS 6.3 MICRONS RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

DATE CODE XXXX

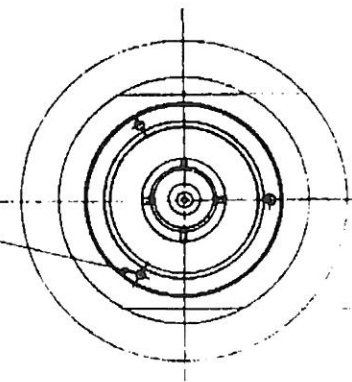

5/8 - 24 UNEF-2B THREAD
 .87 REF (22.03 MM)

(SHEET 1 OF 2)
 M39012/01-0104

S-D

S-D

REVISIONS	
ISSUE	CHANGES
0	EC 17930 NM 6 JAN 77
1	CN 23169 E JEP 13 APR 82
2	CN 29944 D AMD 20 JUN 88
3	CN 32243 A LNM 1 JUN 90

KN-59-295	
USED ON:	
REV:	
FINISH	
SPEC. REF. 10004	
MATL.	
SPEC.	
N PLUG	
DRAWN BY	DATE 6 JAN 78
APPR.	DATE 11-1-78
KINGS ELECTRONICS	
40 MARSHALL ROAD	
TUCKAHOE, N.Y. 10787	
M39012/01-0104	

(SHEET 1 OF 2)

S-D

ITEM	REQ'D	DESCRIPTION	PART NO.
1	1	CLAMP NUT	167A-2-MC7
2	1	BODY	
3	1	WASHER	167A-4-MC7
4	1	GASKET	708-5-M99
5	1	BRAID CLAMP	708-4-MC7
6	1	WASHER	1-1756-1MC7
7	1	INSULATOR	1-1753-1M99
8	1	INSULATOR	1-5520-1M99
9	1	N CONTACT M	1-1755-1M9D
10	1	C-RING	
11	1	GASKET	
12	1	OUTER CONTACT	
13	1	COUPLING NUT	
14	1	CABLING INSTRUCTIONS	3-83-2M88

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3 PLACE DECIMALS ± .004 ANGLES ± 0° 30' 3. NO FILETS PERMITTED.
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES. 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

UNLESS OTHERWISE SPECIFIED:

ISSUE	REVISIONS
1	CN 23169 E JEP 13 APR 82
2	CN 22944 D AMD 20 JUN 88
3	CN 32243 A LNM 1 JUN 90

USED ON: KN-59-295

REF:

FINISH

SPEC. KER 10004

MATL

SPEC.

PARTS LIST

DRAWN M M DATE 6 JAN 78

APP. DATE 1-10-78

KINGS ELECTRONICS
40 MARLEDALE ROAD
TUCKAHOE, N. Y. 10707

S-D M39012/01-0104
(SHEET 2 OF 2)