


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		TAB SIZE	WIRE RANGE AWG (mm <sup>2</sup> )	DIMENSIONS in	
PREFIX	PK			A <sup>±.03</sup> (.81)	W <sup>±.01</sup> (1.3)
D10-250M	-L -D	.250 X .032 (6.3 X 0.8)	12-10 (4.0-6.0)	.72 (18.3)	.25 (6.3)

NOTES:

- USED FOR:  
A. STRANDED COPPER WIRE ONLY
- INSTALLATION TOOLS: CT-100, CT-200, CT-260, CT-570\*, CT-1570\*
- WIRE STRIP LENGTH: 9/32 <sup>+1/32</sup> <sub>0</sub> (7.1 <sup>+.8</sup> <sub>0</sub>)
- MATERIAL  
A. STAMPING: .032 (.81) THICK NICKEL PLATED COPPER
- PACKAGING:  
A. STD: -L = 50  
B. BULK: -D = 500
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm<sup>2</sup>

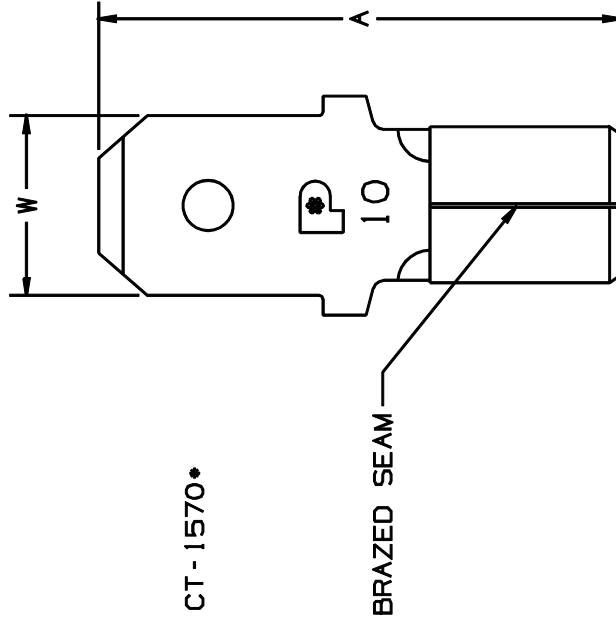

\* APPROVED FOR USE WITH 14-10 AWG (2.5 - 6.0) WIRE WITH CT-570 & CT-1570 TOOLS

A41546\_01

01	8/97	TM	WAS TIN PLATED, ADDED CT-1570 TOOL								
00	9/92	BK	RS	01148	LA	JMO	NON-INSULATED MALE DISCONNECT			12-10 .250 TAB	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	BDK	CHK'D	SCALE	NONE
										TINLEY PARK, ILLINOIS	
DRAWING NO./CADD FILENAME A41546											