




6 5 4 3 2 1

MATERIAL AND FINISH

Insulator: Thermoplastic, Black glass-filled
 UL-94V-0 rated
 Contacts: Brass, Tin plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A 
 Voltage rating: 250 VAC
 Current rating: 15 A 
 Voltage rating: 250 VAC 
 Insulation resistance: 100 Mohm min. at 500 VDC
 Dielectric withstanding voltage: 2000 VAC for one minute

NOTES:

Recommended panel thickness
 0.8mm max. to 2.5mm max.

RECOMMENDED
 PANEL CUTOUT

REV	DATE	CHANGE	REVISIONS		CHNG	CHK	APPR
			BY	DATE			
A	10/27/97	MADE SOLID BUS BAR	SS				
B	06/24/98	ADDED PANEL THICKNESS	SS				
C	09/01/98	PANEL THK WAS 1.0-3.0	LFI				
D	8/99	MOD TABSPNL CUTOUT	JJ				
E	11/99	MODIFY PANEL CUTOUT	JJ				
F	10/23/01	REVISED / REDRAWN	GQ				
							PB
							TD

TOLERANCE
 UNLESS OTHERWISE SPECIFIED

X ± 1
 X.X ± 0.4
 X.XX ± 0.20

DRAWN BY: SOKOLI DATE: 01/06/96
 CHECK BY: AH DATE: 8-11-98
 APPR BY: LH DATE: 8-11-98

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: UNIVERSAL IEC 60320 APPL. INLET &
 OUTLET; QC TERMINALS, SNAP-IN

PD-44R04-11-1 SHEET 1 of 1

SIZE: A ALL DIMENSIONS FOR REFERENCE ONLY
 SCALE: NTS DIMENSIONS ARE IN MILLIMETERS REV: F

This datasheet has been downloaded from <http://www.digchip.com> at this page

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Thermoplastic, Black glass-filled UL-94V-0 rated
Contacts: Brass, Tin plated

ELECTRICAL SPECIFICATIONS:


Current rating: 10 A
Voltage rating: 250 VAC
Current rating: 15 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:


PD-44R04-1-1-1

1) MECHANICAL MOUNTING CONFIGURATION:

2 = SNAP-IN WITH VOLTAGE SELECTOR 115V AND 230VAC







3 = SNAP-IN WITH VOLTAGE SELECTOR 110V AND 220VAC



NOTES:

Recommended panel thickness 0.8mm max. to 2.5mm max.

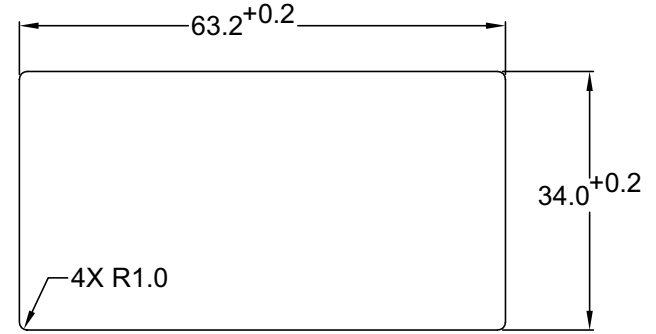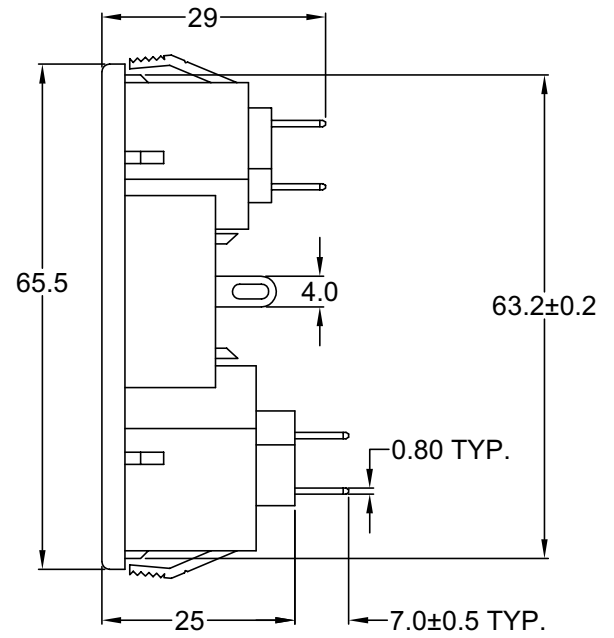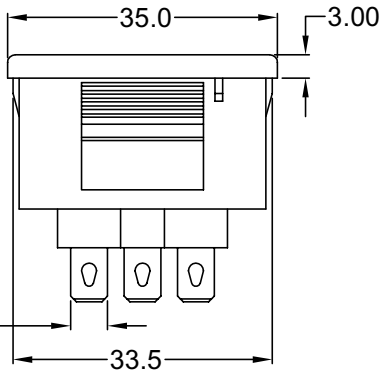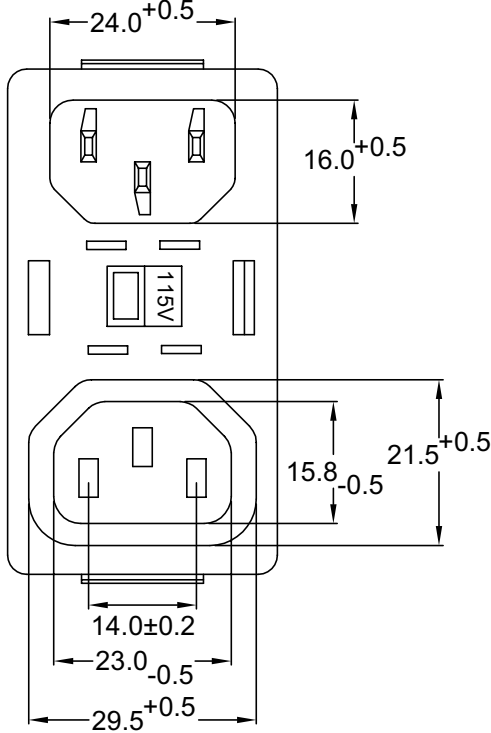

RECOMMENDED PANEL CUTOUT

D

C

B

A

REVISIONS	CHNG	CHECK	APPR
	DATE	CHANGE	

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 10/18/01
CHECK BY	TD	DATE: 11/01/01
APPR BY	PB	DATE: 11/02/01

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: UNIVERSAL IEC 60320 APPL. INLET & OUTLET; QC TERMINALS, SNAP-IN

PD-44R04-X1-1 SHEET 1 of 1

SCALE: NTS ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS

6

5

4

3

2

1