





Scale: 1/1



Unit: mm

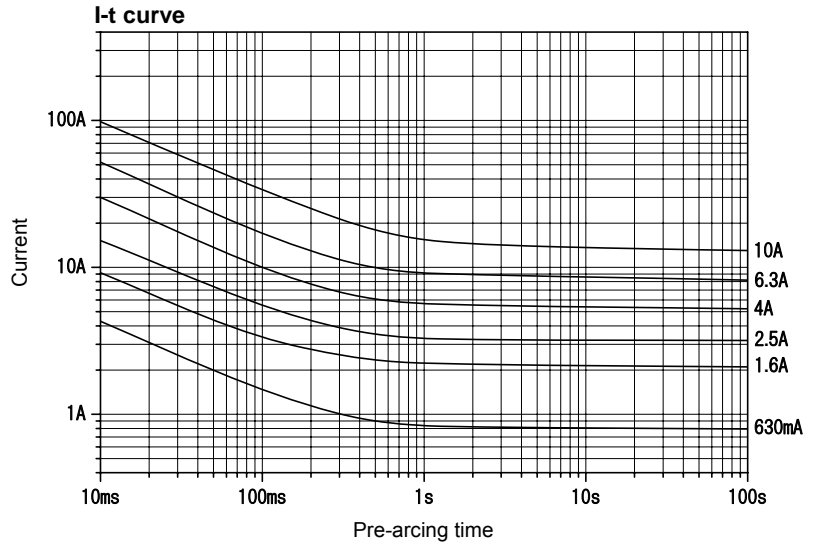

The I-t curves above are plots of the average values of measurements obtained under conditions specified by SOC. These data are for reference only and are not intended to infer any guaranteed values.

Rated voltage	Certification *2	Range of rated current (I _N) *3	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC125V	<PS>E JET	62mA - 12A	500A	PF 0.7 - 0.8	1.1I _N until temperature stabilization occurs.	At 1.1I _N , 140K or less at the center, 60K or less at the contact	Within 60min at 1.35I _N Within 2min at 2.0I _N


*1: High melting temperature type solder containing more than 85 wt% lead is used in this product (over 10 A - 12 A).

*2: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.


*3: Any rated current value can be selected within this range.



Scale: 1/1



Unit: mm

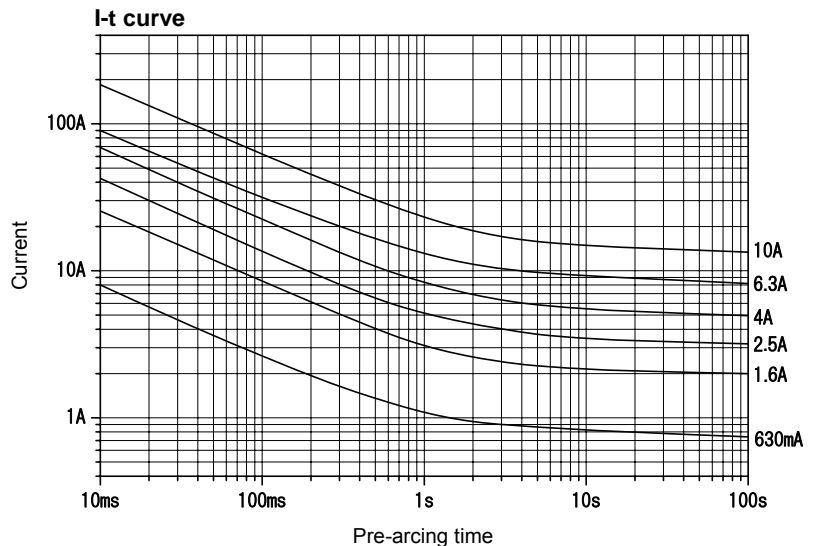

The I-t curves above are plots of the average values of measurements obtained under conditions specified by SOC. These data are for reference only and are not intended to infer any guaranteed values.

Rated voltage	Certification *1	Range of rated current (I _N) *2	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC125V	<PS>E JET	100mA - 10A	500A	PF 0.7 - 0.8	1.1I _N until temperature stabilization occurs.	At 1.1I _N , 140K or less at the center, 60K or less at the contact	Within 60min at 1.35I _N Within 2min at 2.0I _N

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.