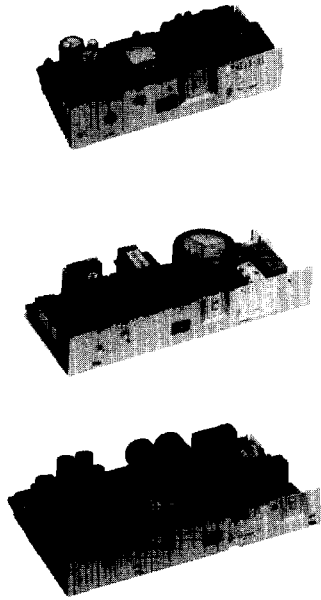


Switching power supplies (For mounting in equipment)

スイッチングパワーサプライ (機器組込型電源)

MULTIPLE OUTPUT

MWE series (17.5, 31, 51W)


 approved
  conforms with the CE marking


Features

- Ultra thin and compact.
- Worldwide input voltage
 - MWE15, 30 : 85~264VAC(continuous).
 - MWE50 : 85~132VAC/170~264VAC (switchable).
- Safety standards : EN60 950:A3(LGA) approved.
UL1950(3rd Edition) approved.
CSA No.950 approved.
- Noise standards : Designed to meets.
EN55022 Class A/B, FCC Class A/B, VCCI Class I, II.
- Immunity : Meets EN61000-4-2~5.

特長

- 小形、薄形設計
- ワイド入力
 - MWE15, 30 : AC85~264V 連続入力対応
 - MWE50 : AC85~132V/AC170~264V 切替え対応
- 安全規格 : EN60 950 : A3(LGA) 認定品
UL1950(第3版) 認定品
CSA No.950 認定品
電気用品取締法 対応設計
- 雑音規格
EN55022 クラスA/B, FCC クラスA/B, VCCI クラスI、II 対応設計
- イミュニティ規格 : EN61000-4-2~5 対応設計

Specifications

Input voltage(V)	(*) Total power(W)	Model	Output voltage (V) and current (A)			Dimensions(mm)	Cable kits optional	
			V1	V2	V3	H×L×W (mm)	In	Out
85~264V AC	17.5	MWE15-01 MWE15-11	+5V/3A +5V/3A	+12V/0.5A +15V/0.5A	-12V/0.5A -15V/0.5A	60×110×25.4 (150g)	CB11	CB12
	31	MWE30-01 MWE30-11	+5V/5A +5V/5A	+12V/1.2A +15V/1.2A	-12V/0.5A -15V/0.5A	60×150×27 (230g)	CB11	CB13
85~132V AC 170~264V AC	51	MWE50-01 MWE50-11 MWE50-21	+5V/8A +5V/8A +5V/8A	+12V/1.5A +15V/1.5A +12V/1.5A	-12V/1A -15V/1A -5V/1A	95×155×27 (330g)	CB11	CB13

- (*)
- Flex power system may be used up to the max. power per channel but not to exceed the total power.
 - フレックスパワー方式:出力電力は各チャンネルの最大電力範囲内で使用できますが全定格出力を超えないこと。

Example: MWE15-01 +5V/3A (15W) +12V/0.5A (6W) -12V/0.5A (6W) Total output 17.5W
 Usage example: 1. +5V/2A (10W) +12V/0.3A (3.6W) -12V/0.2A (2.4W) Total output 16W
 2. +5V/1A (5W) +12V/0.5A (6W) -12V/0.5A (6W) Total output 17W