


REVISIONS

DDC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
2070	A	Released	JN	09-03-09	JWM	09-03-09	JWM	09-03-09

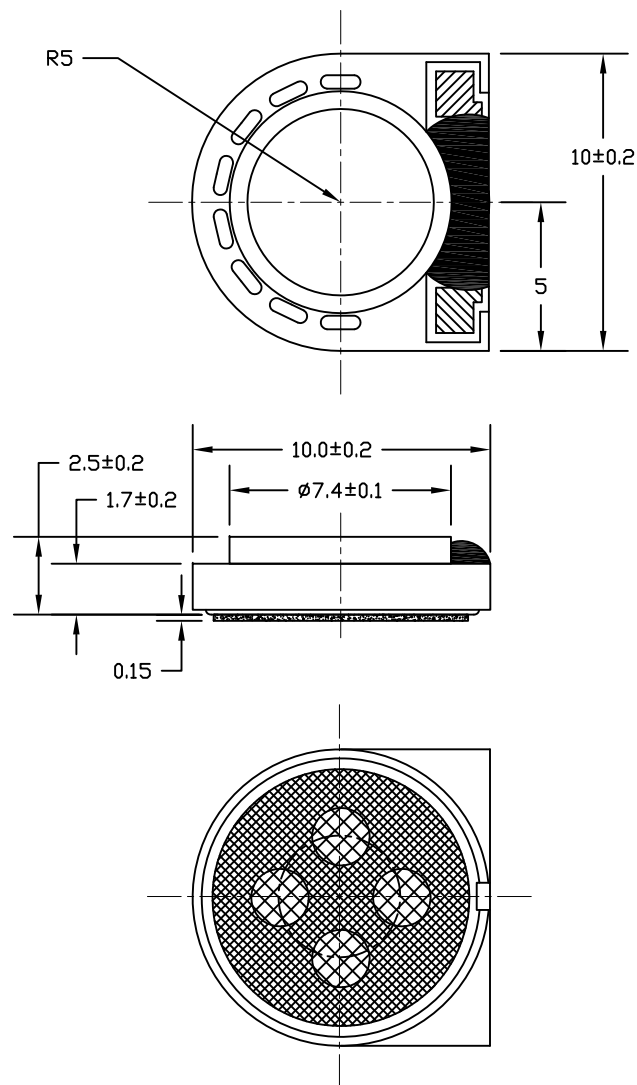

No.	Item	Specification	Test Condition
1	Impedance	32 Ω ± 15%	1Vrms at 1kHz
2	Resonant Fr. (f o)		
3	Frequency Range	300-3.4KHz	
4	Rated Power	1mW	
5	Max Power	10mW	
6	S.P.L.	111± 3dB	179mV at 1kHz
7	Distortion	<10% Max.	at 2kHz/0.56Vrms
8	Sweep Test	must be normal	at sine wave 0.179 V
9	Load Test	after test meet item 8	rated noise power, 24 Hrs.
10	Heat Test	after test meet item 8	70± 2 °C 5Hrs.
11	Cold Test	after test meet item 8	-20± 2 °C 5Hrs.
12	Humidity Test	after test meet item 8	40± 2 °C, 90/95% R.H. 5Hrs.
13	Weight		
14	Polarity Test	When supplied plus D.C. voltage to (+) terminal, the cone must move to forward.	

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Jason Nash

DATE:

09-03-09

CHECKED BY:

Jason Nash

DATE:

09-03-09

APPROVED BY:

Jason Nash

DATE:

09-03-09

DRAWING TITLE:

Speaker & Receiver

SIZE

A

DWG. NO.

MCKP1025R1-4716

ELECTRONIC FILE

25R0886.dwg

REV

A

SCALE:

NTS

U.O.M.:

INCHES [mm]

SHEET:

1 OF 1