


NOTES:




1. MOUNTING: Mounts in a $\phi .250 \pm .002$ [$\phi 6.35\text{mm} \pm .05$] panel hole on .375 [9.5mm] centers. Panel thickness .031 [.8 mm] to .250 [6.35mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, (for thin panels less than .188 [4.75mm] thick, slide SPC 125 spacer on back of lens), and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
4. U.S. & Foreign Pat. Issued & Pend.

REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	001	REVISED PER ECR111009AZ01	4-23-10	SMU

RETAINERS
(ORDER SEPARATELY)




SPC 125

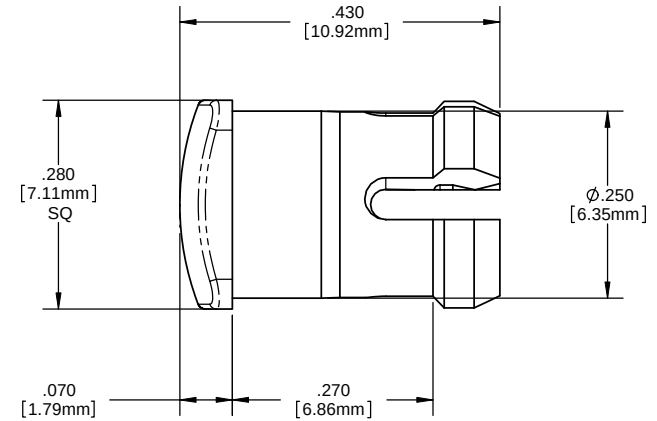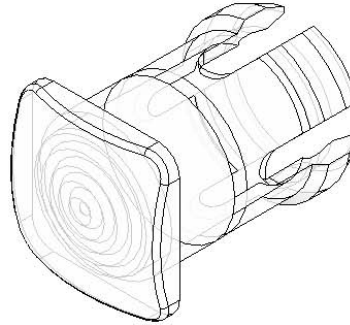

ORDERING CODE : **SQB 400 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES $\pm 1^\circ$ FINISH .X $\pm .020$ XXX $\pm .010$ XXX $\pm .005$		MATERIAL POLYCARBONATE, UL 94-V2		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com	
THIRD ANGLE PROJECTION		FINISH SEE NOTES		TITLE: 5MM SQUARE LOW PROFILE FRESNEL LENS	
APPROVAL		DATE		SIZE	DWG. NO.
DRAWN: SMU		4-23-10		B	SQB 400 XXX
CHECKED: DZ		4-23-10		REV	001
DO NOT SCALE DRAWING		SCALE: 1:1		SHEET 1 OF 1	