


NOTES:




1. MOUNTING: Mounts in a $\phi .250 \pm .002$ [$\phi 6.35\text{mm} \pm .05$] panel hole on .375 [9.5mm] centers. Panel thickness .031 [.8 mm] to .250 [6.35mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, (for thin panels less than .188 [4.75mm] thick, slide SPC 125 spacer on back of lens), and insert LED into lens.
3. MATERIAL: Polycarbonate, UL 94-V2
4. U.S. & Foreign Pat. Issued & Pend.

REVISIONS				
ECN#	REV.	DESCRIPTION	DATE	INITIALS
	1	CHANGE LENS DESIGN FROM FRESNEL TO PLAIN, ADD UL RATING TO MATERIAL.	1-7-10	KH
	001	REVISED PER ECR111009A201	4-23-10	SMU

SPACER
(ORDER SEPARATELY)




SPC 125

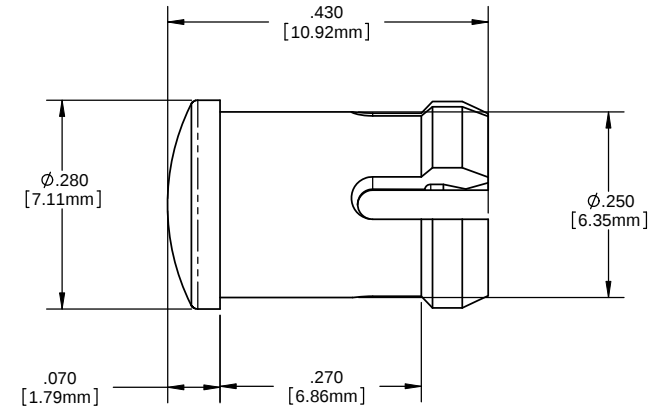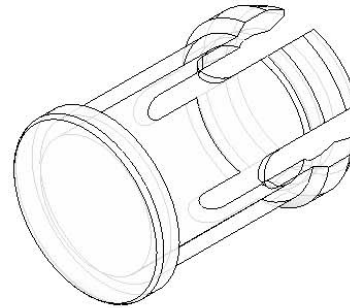

ORDERING CODE : **CLR 301 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		MATERIAL		VISUAL COMMUNICATIONS COMPANY, INC.					
ANGLES X ±.020 XX ±.010 XXX ±.005		POLYCARBONATE, UL 94-V2		190 Bosstick Boulevard, Suite101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com					
FINISH BREAK ALL CORNERS AND SHARP EDGES .030 MAX		FINISH SEE NOTES		TITLE: 5MM ROUND LOW PROFILE PLAIN LENS					
 THIRD ANGLE PROJECTION		APPROVAL		DATE		SIZE			
PROPRIETARY AND CONFIDENTIAL DRAWING OF THE LENS PRODUCT OF VISUAL COMMUNICATIONS COMPANY, INC. THIS DRAWING IS NOT TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF VISUAL COMMUNICATIONS COMPANY, INC. ANY VIOLATION OF THIS STATEMENT WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.		DRAWN: SMU		4-23-10		DWG. NO.			
		CHECKED: DZ		4-23-10		REV			
		DO NOT SCALE DRAWING		SCALE: 1:1		SHEET 1 OF 1			
				B		CLR 301 XXX		001	