

# Microtron® Printed Circuit Board Fuses

## .122" × .297" (3.10mm × 7.54mm)


MCR



Actual Size

Product Name: MCR (Microtron®)  
 Characteristics: Fast Acting, Current Limiting  
 Construction: Solid Matrix  
 Packaging & Ordering Information:

### Dimensional Data

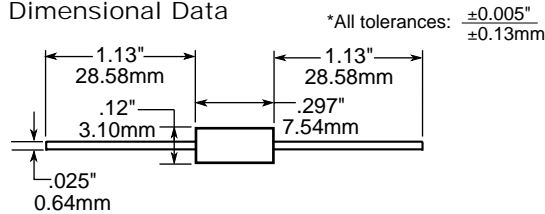


Product	MCR	(See Table)
Package Code	Rated Current Symbol	
Blank 10 in		
BK 500 in		
TR/ Tape/Reel 2500 units, 52.4mm spacing		
TR1/ Tape/Reel 5000 units, 52.4mm spacing		
TR6/ Tape/Reel 1000 units, 52.4mm spacing		
Radial leaded versions available (.4", .6" spacing)		

Weight = 2.45 lbs/2500

### Time-Current Characteristics:

Rated Current	Percent of Rating	
	100%	250%
0-10A	4 hrs. (min)	5 sec. (max)

Time-Current Characteristic Curves—Average Melt (Full Size Curves Available)

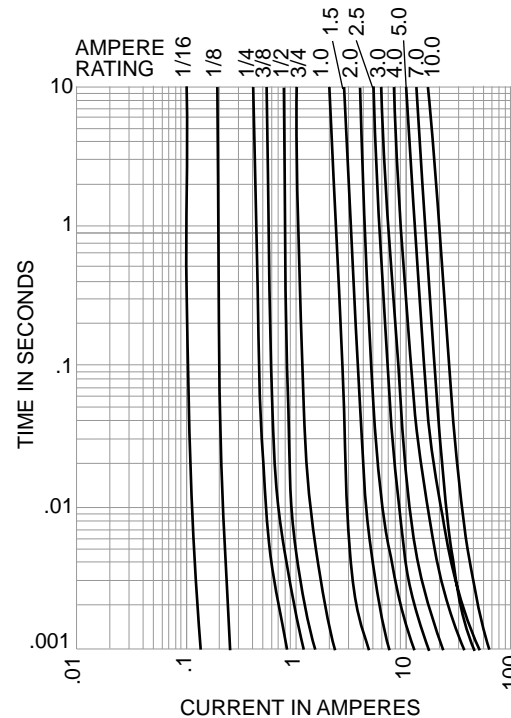

CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

### Electrical Characteristics

Current Rating	Rated Voltage		Interrupting Rating <sup>1</sup>		Pre-arcing <sup>2</sup> I <sup>2</sup> t (A <sup>2</sup> sec)		Typical Total Clearing <sup>2</sup> I <sup>2</sup> t (A <sup>2</sup> sec)		Typical Voltage Drop Volts at 100% Rated Current	Agency* Approvals		
	AC (Max.)	DC (Max.)	AC	DC	AC	DC	AC	DC		UR	CSA	JIS
1/16	125V	125V	50A	300A	1.1 × 10 <sup>-6</sup>	1.0 × 10 <sup>-7</sup>	1.8 × 10 <sup>-6</sup>	1.5 × 10 <sup>-7</sup>	2.33	•	•	
1/8	125V	125V	50A	300A	4.3 × 10 <sup>-6</sup>	7.1 × 10 <sup>-7</sup>	7.3 × 10 <sup>-6</sup>	8.7 × 10 <sup>-7</sup>	1.52	•	•	
1/4	125V	125V	50A	300A	8.0 × 10 <sup>-5</sup>	1.0 × 10 <sup>-6</sup>	1.2 × 10 <sup>-4</sup>	1.3 × 10 <sup>-6</sup>	.76	•	•	
3/8	125V	125V	50A	300A	9.7 × 10 <sup>-5</sup>	6.7 × 10 <sup>-6</sup>	1.1 × 10 <sup>-4</sup>	8.3 × 10 <sup>-6</sup>	.73	•	•	
1/2	125V	125V	50A	300A	7.4 × 10 <sup>-4</sup>	5.4 × 10 <sup>-5</sup>	6.2 × 10 <sup>-3</sup>	6.8 × 10 <sup>-5</sup>	.65	•	•	
3/4	125V	125V	50A	300A	1.3 × 10 <sup>-3</sup>	7.4 × 10 <sup>-5</sup>	7.5 × 10 <sup>-2</sup>	9.2 × 10 <sup>-5</sup>	.55	•	•	
1	125V	125V	50A	300A	.01	.01	.02	.01	.24	•	•	•
1 1/2	125V	125V	50A	300A	.03	.02	.04	.03	.20	•	•	•
2	125V	125V	50A	300A	.09	.07	.11	.08	.16	•	•	•
2 1/2	125V	125V	50A	300A	.19	.14	.25	.17	.15	•	•	•
3	125V	125V	50A	300A	.35	.28	.45	.32	.15	•	•	•
3 1/2	125V	125V	50A	300A	.56	.37	.83	.43	.14	•	•	•
4	125V	125V	50A	300A	.96	.67	1.37	.77	.13	•	•	•
5	125V	125V	50A	300A	1.82	1.34	2.53	1.51	.11	•	•	•
7	60V	90V	50A	300A	1.48	.49	2.02	.58	.10	•	•	
10	60V	90V	50A	300A	3.62	1.16	4.41	1.38	.08	•	•	

\*Approvals: UL Recognition STD 248-14, Guide JDYX2, File E19180; CSA Certification, Class 1422-01, File 53787.

JIS (Japanese Industrial Standard) Reg. No. 2221, Authorization No. 32-1516.

1. Interrupting ratings were measured at 100% (1/16 to 5) and 100% (7, 10) power factors on AC, and a time constant less than 1ms. on D.C.  
 2. I<sup>2</sup>t was measured at 50 amps 125 VAC, .95PF, (random closing angle) and 300 amps 125 VDC, TC <1ms. for 1/16 through 5 amps and 50 amps 60 VAC, .95PF, (random closing angle), and 300 amps 90 VDC, TC <1ms. for the 7 and 10 amp fuses.  
 Note: All values shown above are typical.



# Microtron® Printed Circuit Board Fuses

**.122" × .297" (3.10mm × 7.54mm)**

MCR



Typical Voltage Drop (At 25° C Ambient Temperature)

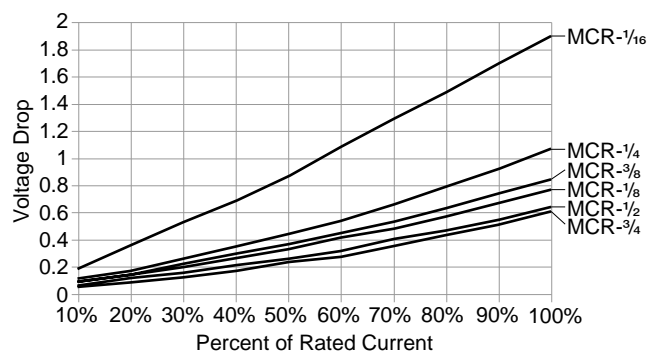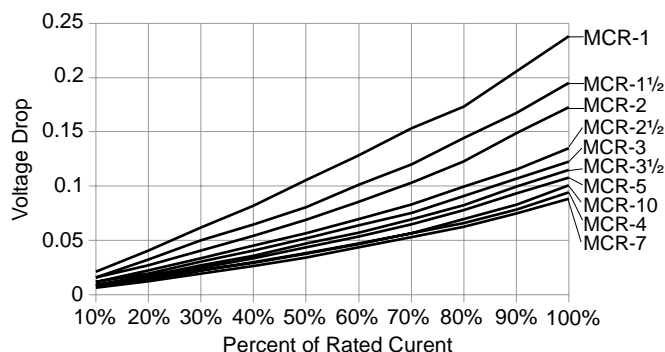

Microtron fuses are designed to meet the following specifications:

Body	High temperature thermoplastic, flammability rating UL 94 VO.	Resistance to Soldering Heat	MIL-STD-202, Method 210, Test Condition C (260°C).
Electrical Characteristics	Carry 100% rated current for 4 hours minimum. Open at 250% of rated current in 5 seconds maximum.	Salt Spray	MIL-STD-202, Method 101, Test Condition B.
Element	Solid Matrix, gold or silver element encapsulated in ceramic.	Shock	MIL-STD-202, Method 213, Test Condition I, 100G's for 6 milliseconds.
Leads	Tin-plated copper, .64mm (.025") diameter.	Solderability	MIL-STD-202, Method 208.
Lead Bend Test	With a two pound weight attached, 90° one direction, back to original position, then 90° opposite direction; fuse will withstand two cycles.	Terminal Strength	MIL-STD-202, Method 211, Test Condition A, will withstand 7 lb. axial pull test.
Life Test	2000 hours at 80% rated current, 55°C.	Thermal Shock	MIL-STD-202, Method 107, Test Condition B, -65°C to 125°C.
Moisture Resistance	MIL-STD-202, Method 106, 90% relative humidity at 65°C.	Thermal Cycle	EIA-STD-RS-186-C, Test Condition A, -55°C to 85°C.
Operating Temperature	-55°C to 125°C with proper fuse derating.	Vibration	MIL-STD-202, Method 204, Test Condition C, (55 to 2000 HZ, 10G's peak).
Packaging	EIA-STD-296-E.	Wave Soldering	Maximum reservoir temperature 260°C, 10 second maximum exposure, .125" from body.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.